


Ceramic High Pass Filter

50Ω 9700 to 15000 MHz

HFCN-103+

The Big Deal:

- Small size 3.2mm x 1.6 mm
- High Power handling (7W)
- High rejection (30 dB typ)
- Ceramic construction



CASE STYLE: FV1206-4

Product Overview:

New High Pass Filter HFCN-103+ is an LTCC based 7 section design, that extends the upper frequency cutoff range of the existing HFCN series to 10 GHz. Systems that previously relied on large distributed filter elements to support these lower frequencies can save space and system complexity by integrating the HFCN-103+ into new designs. These filters are offered in a EIA 1206 package size and have a typical stop band rejection of 30 dB.

Key Features

Feature	Advantages
Small Size (3.2mm x 1.6 mm)	Available in the size of typical resistors or capacitors (EIA 1706), the ultra small HFCN series integrates up to 7 high pass sections in a simple SMT chip form factor.
High Power Handling	The HFCN series can withstand up to 7W CW signal without damage making this filter ideal for use in medium power to transmit paths.
Temperature Stability	Over a 155°C operating temperature range (-55°C to +100°C), the HFCN series ceramic filters typically exhibit low pass band insertion loss variation.
High Rejection	Achieving 30dB rejection from DC-5700 MHz; the HFCN-103+ provides a versatile high pass configuration for many up converter applications.

Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Ceramic High Pass Filter

HFCN-103+

50Ω 9700 to 15000 MHz



CASE STYLE: FV1206-4

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	7W max. at 25°C



* Passband rating, derate linearly to 3W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

Pin Connections


RF IN	1
RF OUT	3
GROUND	2,4

Product Marking: AR

Outline Drawing



PCB Land Pattern




Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J
.126	.063	.037	.026	.075	.012	.182	.104	.069
3.20	1.60	0.94	0.66	1.91	0.30	4.62	2.64	1.75
K	L	M	N	P	Q	R	wt	
.119	.041	.039	.013	.024	.020	.039	grams	
3.02	1.04	0.99	0.33	0.61	0.51	0.99	.020	

Demo Board MCL P/N: TB-637+ Suggested PCB Layout (PL-530)

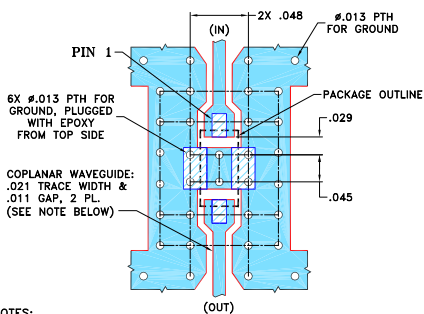

NOTES:

- TRACE WIDTH & GAP ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low cost
- small size, ".12" x ".06"
- 7 sections
- temperature stable
- excellent power handling, 7W
- hermetically sealed

Applications


- sub-harmonic rejection
- transmitters/receivers
- lab use

Electrical Specifications^(1,2) at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Stop Band	Rejection Loss	DC-F1	DC - 5700	30	—	dB
		F1-F2	DC - 6500	20	—	dB
	Freq. Cut-Off	F3	8400	—	3.0	dB
	VSWR	DC-F2	DC - 6500	—	20	:1
Pass Band	Insertion Loss	F4-F7	9700 - 15000	—	2.0	dB
	VSWR	F5-F6	10000 - 11000	—	1.8	dB
		F4-F7	9700 - 15000	—	2.0	:1

- (1) In Application where DC voltage is present at either input or output ports, dc de-coupling capacitors are required.
- (2) Measured on Mini-Circuit's Characterization Test Board TB-637+.

Typical Frequency Response

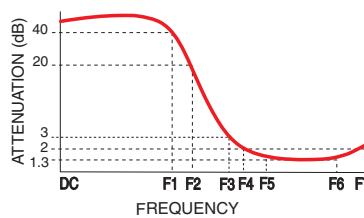

Electrical Schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
10.00	71.76	322.99
100.00	52.00	394.14
1000.00	34.16	174.73
2160.00	33.48	106.97
4080.00	39.88	89.02
5030.00	44.64	64.14
10050.00	1.22	1.60
12170.00	1.14	1.70
14070.00	1.01	1.15
15200.00	1.18	1.65

